

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 August 2003 (07.08.2003)

PCT

(10) International Publication Number
WO 03/064206 A1

(51) International Patent Classification⁷: **B60N 2/48**

(21) International Application Number: **PCT/US03/02582**

(22) International Filing Date: 29 January 2003 (29.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/352,918 29 January 2002 (29.01.2002) US

(71) Applicant (for all designated States except US): **INTIER
AUTOMOTIVE SEATING OF AMERICA, INC.**
[US/US]; 600 Wilshire Drive, Troy, MI 48084 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **REED, Steven,
James** [US/US]; 8835 McGregor Lane, Pinckney, MI

48169 (US). **MILOSIC, Mari, C.** [US/US]; 1383 Bedford, Grosse Pointe Park, MI 48230 (US). **ROLAND, Furtado** [IN/US]; 19458 Silver Spring Drive, Apt. 204, Northville, MI 48167 (US).


(74) Agents: **ASHER, Robin, W.** et al.; Clark Hill PLC, Suite 3500, 500 Woodward Avenue, Detroit, MI 48226-3435 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: **VEHICLE SEAT HAVING A HEAD RESTRAINT INDEPENDENT FROM ITS BACKREST**

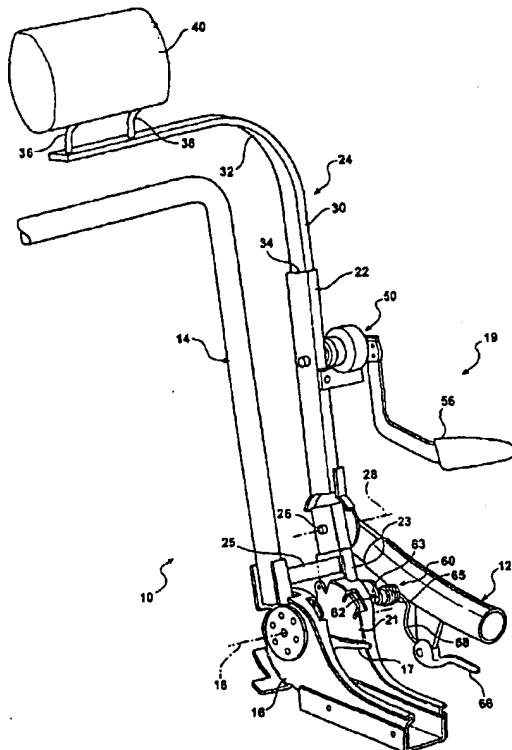

(57) Abstract: A seat assembly for supporting an occupant in an automotive vehicle. The seat assembly includes a seat cushion and a seat back. The seat back is operatively coupled to the seat cushion for pivotal movement of the seat back about a first pivot axis relative to the seat cushion. A head restraint support assembly is operatively coupled to the seat cushion for pivotal movement with the seat back about the first pivot axis and independent pivotal movement relative to the seat back about a second pivot axis.